




The Place for Commercial Carpet Tiles

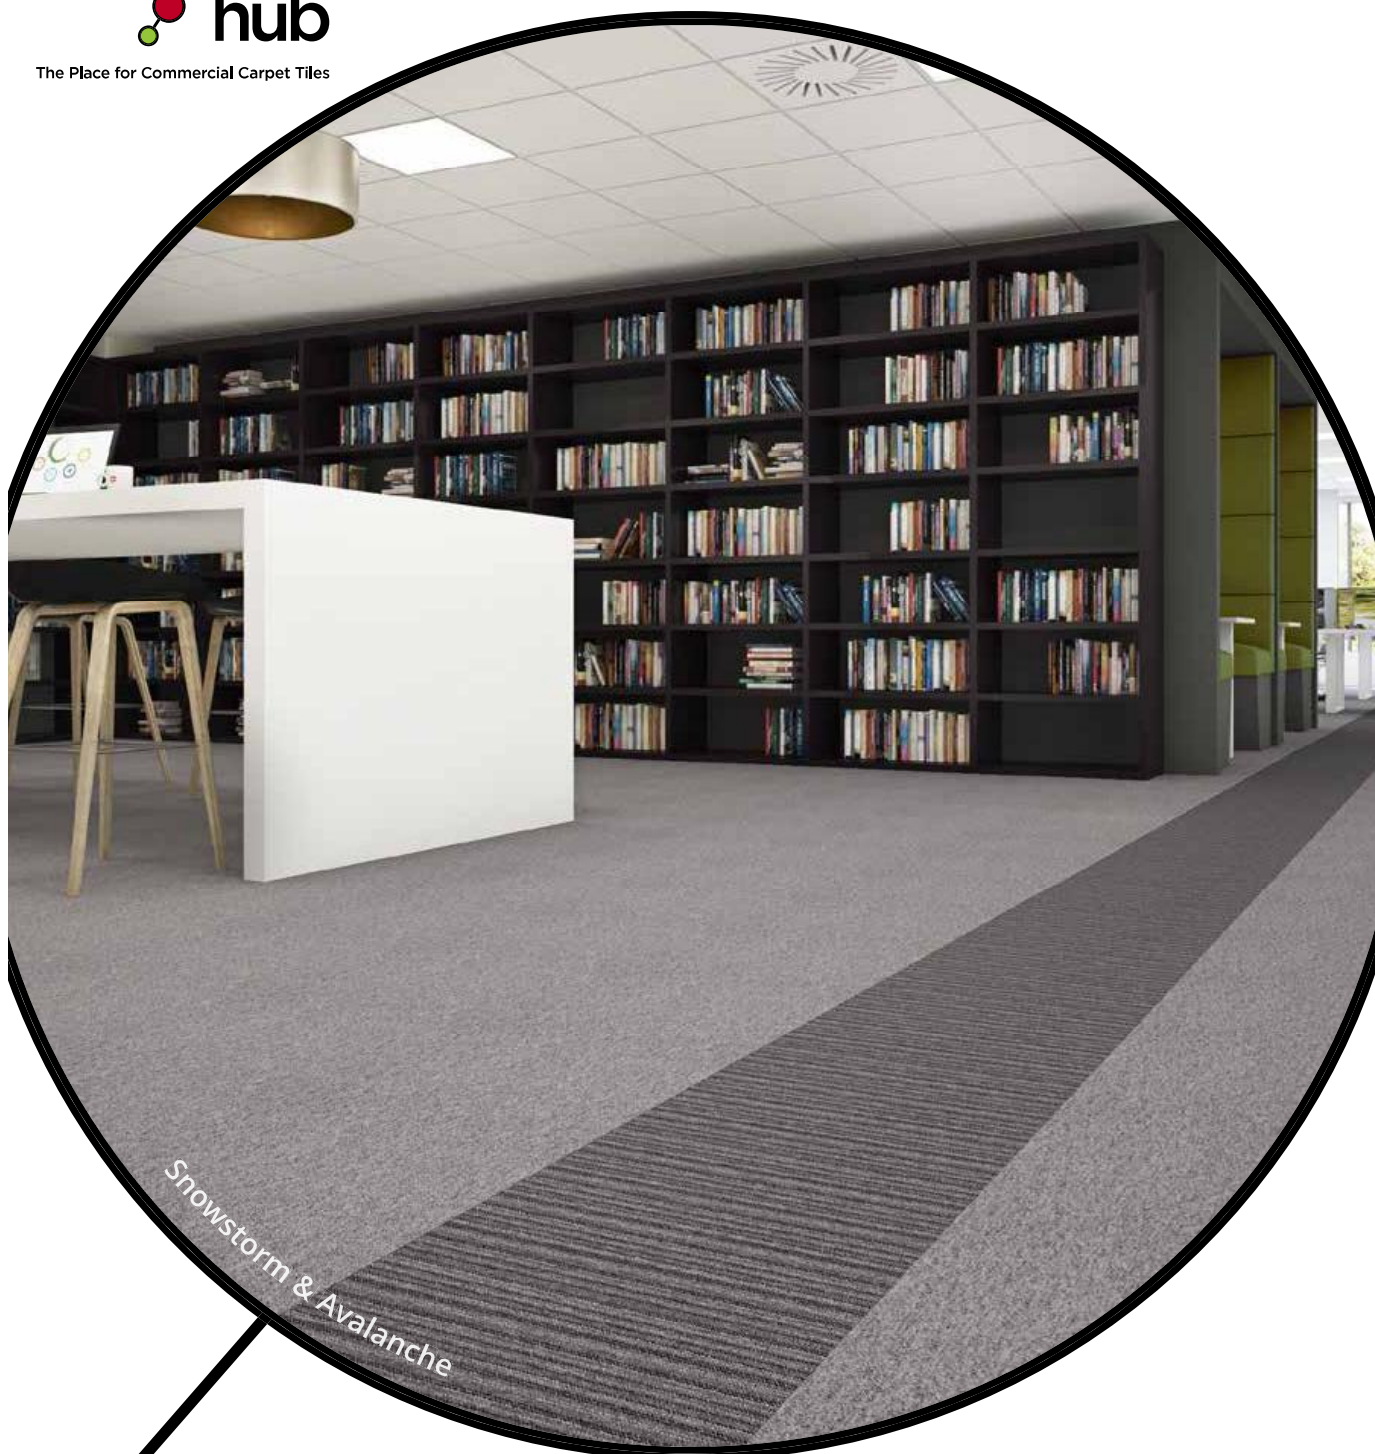

Skyscape

Plain carpet tile with stripe co-ordinate

Skyscape



Typhoon



Cyclone



Hail



Heatwave



Wildfire



Duststorm



Blizzard

Plain carpet tile with stripe co-ordinate



Whirlwind



Avalanche




Monsoon



Lightning



Snowstorm

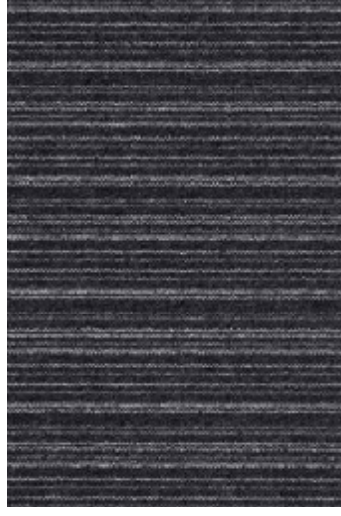

Derecho



Heatwave

Skyscape Specification

COMPOSITION		
Construction	ISO2424	Tufted 1/10th Loop Pile
Pile Fibre	ISO2076	100% Polypropylene
Primary Backing	ISO2424	PA/PES non-woven
Secondary Backing	ISO2424	Polyflex with non-woven fabric
Pile Height	ISO1766	2.9 mm ± 0.5mm
Total Height	ISO1765	5.9 mm ± 0.5mm
Pile Weight	ISO1958	400 gr/m ² ± 5%
Total Weight	ISO8543	3700 gr/m ² ± 10%
Tile Size	EN994	50 x 50 cm
Tiles per Box		20 tiles per box (5m ²)
CLASSIFICATION		
Flammability (Fire Spread EN13501)	ISO11925	Fs ≤ 150mm within 20 seconds
Flammability (Radiant Panel EN13501)	ISO9239	Cr-S1
Flammability (Hot Metal Nut)	BS4790	Low radius effects of ignition
Wear Resistance (Castor Chair Test)	ISO4918	Mat protectors recommended
Electrical Vertical Resistance	ISO10965	Pass ≤ 10 ⁹ Ω
Electrostatic Propensity (Stroll Test)	ISO6356	Pass < 2.0kV
Slip Resistance	EN13893	DS
Dimensional Stability	EN986	Pass < 0.2%
Colour Fastness – Light (CIELAB)	ISO105	4.4
Colour Fastness – Rubbing (CIELAB)	ISO105	5
Colour Fastness – Water (CIELAB)	ISO105	5
Classification for Use	ISO10874	Class 31 Commercial Moderate
Luxury Class Rating	EN1307	LC1

WARRANTY

5 Year Wear Warranty

CERTIFICATION




INSTALLATION

Plain Tiles



MONOLITHIC QUARTER TURN

Striped Tiles



BRICK QUARTER TURN