

 **PALIO CLIC**
by Karndean







PALIO CLIC

by Karndean

Palio Clic by Karndean is a new type of luxury vinyl flooring with a patented click-locking system. Designed for quick and easy installation, with Palio Clic you can achieve an authentic and luxurious feel in your space in no time at all.

With eight intricate wood and four classic stone designs, each plank and tile boasts realistic textures and grain details with a hard-wearing and easy to clean wear layer.

The eight wood look planks are available in a popular large plank format while the four stone designs are available as a contemporary, rectangular tile format.



Why Palio Clic?



Click-locking system

Simply click your planks or tiles into place with our patented locking system.



Quick and easy to install

All you need is a sound, smooth, dry and dust free subfloor to start laying immediately. You can find an easy to follow installation guide on our website.*



No need for adhesive

Our patented locking system means there's no need for adhesive and minimal preparation time is required.



Realistic appearance

The authentic designs, structured surfaces and bevelled edges of each plank and tile imitate nature to perfection.



Suitable for renovation

At just 4.5mm thick, it is ideal for laying over most existing hard floor coverings.

*www.karndean.com/palioctic





Durable

With a 0.4mm wear layer Palio Clic is very hard wearing and ideal for use in the home and public areas with light to medium traffic.



Easy to clean

Mop up spills as soon as possible, using a pH neutral cleaner, to reduce the risk of staining.



Warm Underfoot

Our products are softer and warmer underfoot than natural wood and stone flooring.



Underfloor heating

Compatible with underfloor heating up to 27°C.



100% Recyclable





Sorano

CP4508

1220mm x 179mm
(48" x 7")





Montieri

CP4504

1220mm x 179mm

(48" x 7")





Asciano

CP4502

1220mm x 179mm

(48" x 7")





Arezzo

CP4503

1220mm x 179mm
(48" x 7")





Vetralla

CP4506

1220mm x 179mm

(48" x 7")





Crespina

CP4505

1220mm x 179mm
(48" x 7")





Bolsena

CP4507

1220mm x 179mm

(48" x 7")





Lucca

CP4509

1220mm x 179mm
(48" x 7")





Murlo

CT4302

600mm x 307mm

(24" x 12")





Pienza

CT4303

600mm x 307mm
(24" x 12")





Volterra

CT4301

600mm x 307mm
(24" x 12")





Cetona

CT4304

600mm x 307mm
(24" x 12")



Palio Clic **Wood**

1220mm x 179mm (48" x 7")



Crespina CP4505 pg 10



Arezzo CP4503 pg 8



Montieri CP4504 pg 6



Vetralla CP4506 pg 9



Bolsena CP4507 pg 11



Sorano CP4508 pg 5



Lucca CP4509 pg 12



Asciano CP4502 pg 7

Palio Clic **Stone**

600mm x 307mm (24" x 12")




Volterra CT4301 pg 15



Murlo CT4302 pg 13





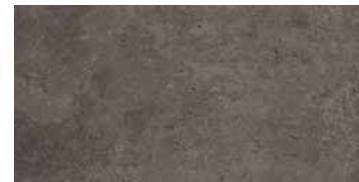

















Pienza CT4303 pg 14



Cetona CT4304 pg 16

Technical specification

	Standard	Result
 Size		Plank 1220mm x 179mm Tile 600mm x 307mm
 Thickness		4.5mm
 Wear layer		0.4mm
 Guarantee	Light industrial Commercial Domestic	12 years* 12 years* Lifetime guarantee*
 Bevelled edge		No
 Standards	EN 649	Pass
 Classification	EN 685- Light industrial EN 685- Commercial EN 685- Domestic ASTM F1700	4l: Light industrial moderate 32: Commercial general 23: Domestic heavy Class III Type B
 Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 ASTM E648-06	Bfl-s1 Pass Pass Class 1
 Staining resistance	EN 423 ASTM F925	Class 0 Pass
 Light fastness	EN ISO 105-B02 ASTM F1515	≥7 <8
 Abrasion resistance	EN 660-2 ASTM D3884	Group T Pass
 Dimensional stability	EN 434 ASTM F2199	≤ 0,15% Pass
 Acoustic impact noise reduction	EN ISO 717-2 EN ISO 140-8	$\Delta L_W = 4$ dB
 Electrical behaviour body voltage	EN 1815	Pass
 Indentation - residual	EN 433 ASTM F1914	≤ 0,1mm <8%
 Castor chair continuous use	EN 425	Pass
 Thermal conductivity	ISO 8302	0,0197 m ² K/W Suitable for underfloor heating. Max 27°C
 Slip resistance	BS 7976 DIN 51130 DIN 51097 EN 13893 ASTM C1028	Plank - 63 (Dry) 38 (Wet) Tile - 52 (Dry) 30 (Wet) R10 Plank B, Tile C DS ADA Compliant
 Adhesive	None required; please install according to our installation instructions.	
 Recycling		Suitable

*Subject to terms



Patio Clic by Karndean uses a patented LZC locking mechanism



Things to know about Palio Clic

Get ready...

Acclimatisation of material

It's important to remove Palio Clic from its packaging at least 48 hours before installation to allow the product to acclimatise. Room temperature should be between 18-26°C.

Tiles and planks may be stacked, but must be rested flat.

Subfloors

All subfloors should be solid, smooth, sound, clean, dry and dust-free before installation.

Palio Clic will go over the following floor types*:

- Concrete
- Tiles - Quarry, Mosaics, Terrazzo, Ceramics
- Wooden/ Timber floors
- Linoleum/Vinyl/Cork Floors
- Metal and Painted Floors

*see installation guidelines for full details

Underlay


An underlayment is not required for installation but can be used if additional sound insulation is required.

Set...


Installation

You need to allow a gap of 5mm around the edge of your room and all fixed objects, including pipes for expansion.

Plank products should be laid with staggered joints, at a distance of at least 100mm.



Tile products should be laid in a brick bond to give the floor maximum stability and enhance the aesthetics of the floor.



Exclusions

Do not use Palio Clic in rooms that are exposed to large temperature fluctuations.

Tools

For a successful installation the following tools will be necessary: Rubber mallet, utility knife, wall spacers, carpenter's square, hand roller (optional), pull bar.

Go...

Taking care of your floor

- Regularly sweep the floor to remove loose dirt or grit as these can cause fine scratches
- For a thorough clean, use a pH neutral cleaner such as Karndean Clean. Avoid the use of regular household cleaners and bleach-based detergents.
- Use entrance mats to protect against grit and moisture. We recommend Turtle Mat.


For more details on looking after your floor visit

www.karndean.com/cleaning

Palio Clic Installation Guidelines


Step 1. Install the first tile or plank with the tongue side facing the wall, fit 5mm spacers between the plank and wall. (Fig. 1)

Fig. 1




- And an off-cut of the product or a hand roller to securely fix the tiles/planks together. (Fig. 5).

Fig. 5




Step 2. Lay the first row, ensuring the short edges are clicked together. (Fig. 2)

Fig. 2



- A pull bar can be used to pull the product together around the edges of the room. (Fig. 6)


Fig. 6



Step 6. Repeat section 4 and 5 until the installation is complete.


Step 4. Start the second row by clicking the tongue into the groove holding the tile or plank at an angle (approximately 30°), then push the tile or plank firmly into the groove of the first row. (Fig. 3)

Fig. 3



Step 7. Once the floor is fitted, remove the spacers; sweep the floor with a soft brush. Fix the skirting boards or suitable edge trim to cover the expansion gaps. These should be fixed to the wall and not the floor. (Fig. 7 & 8)

Fig. 7




Step 5. Fit the next tile or plank by clicking the tongue and groove together along the short edge. Ease the tongue and groove together on the long side by angling the tiles/planks together.

Fig. 4



- Continue to fit tiles/planks across the room until the row is complete. We recommend using a rubber mallet (Fig. 4)

Fig. 8





Cleaning and maintaining your floor

Palio Clic by **Karndean** is hardwearing and easy to look after. Our enhanced surface treatment helps protect against everyday wear, spills and scuffs. This makes it easier and more environmentally friendly to clean and maintain, giving you peace of mind that your Karndean floor will look great for years to come.

We have a dedicated section on the website with videos which explain how best to look after your Karndean floor and covers lots of frequently asked questions from our customers.

We also have our own Floor Care Kits that you can order from your local retailers including everything you need for a simple cleaning routine.

Inside your Floor Care Kit

Regular cleaning with a pH neutral cleaner such as **Karndean Clean** will help keep your floor at its best.

After time you may want to treat your floor to some extra care. We recommend every six to twelve months, depending on wear, that you strip and refresh your floor using **Karndean Remove** and **Karndean Refresh**, to further enhance its look and durability.

- 1 Karndean Clean 750ml
- 2 Karndean Remove 750ml
- 3 Karndean Refresh 750ml
- 4 Floor Protector Pack
- 5 Refresh Pad (soft/white)
- 6 Remove Pad (coarse/white)
- 7 Applicator
- 8 Floor Care Guide



To help protect your Karndean floor we recommend using a Turtle Mat.



Find a Retailer

Simply visit our website at www.karndean.com/FAR where you can select a local retailer of your choice and arrange for them to contact you.

Visit our Evesham showroom. Just off the A46 at Vale Park Business Centre, Evesham.



Where to see Karndean

Visiting our showroom or one of our retail partners is the perfect way look at all of the designs, speak to a flooring expert, and see the friction grip backing in action.

You'll also be able to take home Karndean LooseLay samples so you can match it to the colours in your home, giving you complete confidence you've picked the perfect floor.



GB | Colour and Pattern Reproduction

We are careful to make sure our brochures are accurate and printed to very high standards, but photography and printing cannot always create a perfect representation of our products. For this reason we strongly recommend that you look at a sample of any product you are considering before placing your order.

All of our products are inspired by things we have seen in the natural world. Just as variation in colour and detail is part of the unique beauty of natural materials, it is also a feature of many of our designs.

This means that with some of our products you will see natural variation when your floor is laid. If in doubt, ask your retailer to show you a larger sample of the product.

We love developing new ideas and improving on our existing designs. This does mean that sometimes products are withdrawn at short notice. We hate to disappoint, and will always try to work with you to find an alternative design that you love just as much.





PALIO CLIC

by Karndean

Contact us...

Crab Apple Way
Evesham
Worcestershire
WR11 1GP

Tel: 01386 820100*
info@karndean.co.uk
www.karndean.com/palioclic

*Calls may be recorded for training and quality purposes.

Follow us online and see what we've been up to:

