

# WESTEND VELVET COLLECTION



**westex.**  
DYE SERVICE

Create your own  
bespoke colour with  
our unique dye service



For richness, comfort and style, the Westend Velvet collection is hard to beat - tasteful good looks and a luxurious underfoot feel.

Available in 5 widths:  
**1.00m, 3.66m (12ft), 4.00m, 4.57m (15ft) & 5.00m**

Method of Manufacture:  
**2 Fold Tufted Cut Pile**

Pile Material:  
**80% Wool 20% Nylon**


Colour Palette:  
**89 Standard Colours - Available in All 3 Qualities**

IMO Certified  
IMO FTP Code 2010 Part 2 & Part 5



Available on Request

## 3 LUXURY QUALITIES

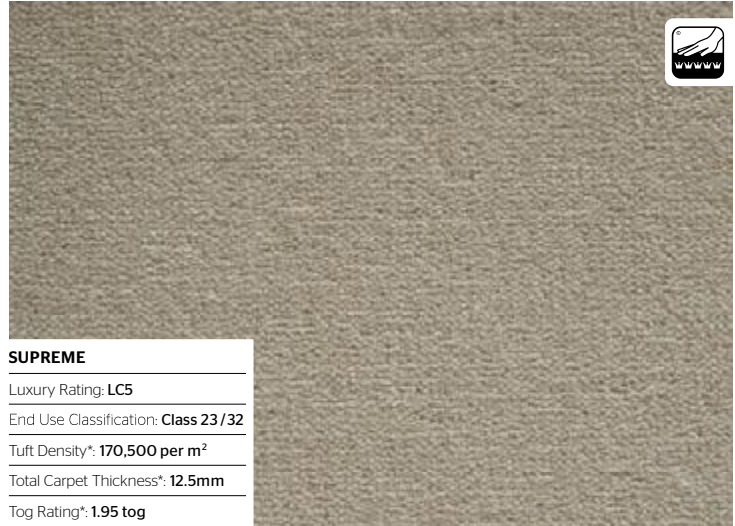

### SUPREME

Luxury Rating: **LC5**  
End Use Classification: **Class 23 / 32**  
Tuft Density\*: **170,500 per m<sup>2</sup>**  
Total Carpet Thickness\*: **12.5mm**  
Tog Rating\*: **1.95 tog**



### PRESTIGE

Luxury Rating: **LC5**  
End Use Classification: **Class 23 / 32**  
Tuft Density\*: **136,400 per m<sup>2</sup>**  
Total Carpet Thickness\*: **12.5mm**  
Tog Rating\*: **1.92 tog**



### WESTEND

Luxury Rating: **LC4**  
End Use Classification: **Class 22 / 32**  
Tuft Density\*: **120,900 per m<sup>2</sup>**  
Total Carpet Thickness\*: **11.0mm**  
Tog Rating\*: **1.68 tog**

\*+/- 10% commercial tolerance

















Westex Carpets Limited.  
Castle Mills, Moored, Cleckheaton, West Yorkshire, BD19 3PS, United Kingdom  
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266  
westexflooring.com info@westexflooring.com

**westex.**

FLOORING EXCELLENCE

## Technical Specification

Luxury Rating	BS EN 1307:2014	LC4	
End Use Classification	BS EN 1307:2014	Class 22 General Domestic Use Class 32 General Commercial Use	 
Hexapod 4000	BS EN 1307:2014	3.0	
Hexapod 12000	BS EN 1307:2014	2.0	
Roll Widths		Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m	
Roll Length		Customisable (80m <sup>2</sup> +)	
Method of Manufacture		2 Fold Tufted Cut Pile, 1/8" Gauge	
Tuft Density*	ISO 1763	120,900 per m <sup>2</sup>	
Pile Material		80% Wool 20% Nylon	
Pile Height above Backing*		9.0mm	
Total Carpet Thickness*		11.0mm	
Primary Backing		Polypropylene	
Flammability	BS4790 Hot Nut Test	Low Radius of Char	
Reaction to Fire	BS EN 13501	Class C <sub>fl</sub> -s1	
Delamination	BS ISO 11857	Pass Minimum 15.00 (N)	
Thermal resistance	BS4745	1.68 tog	
Dimensional Stability	ISO 2551-1981 (2010)	Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5%	
Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing	BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12	4-5 4 4	
Electrical Resistance	ISO 10965:2011	Pass Does not exceed 10Ω	
Sound Absorption		Class C with Underlay	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Guarantee		6 Years	
IMO Certified	IMO FTP Code 2010 Part 2 & Part 5	Pass Available on request	
CE Mark	EN 14041		

\*Commercial Tolerance +/- 10%
















Westex Carpets Limited.  
Castle Mills, Moored, Cleckheaton, West Yorkshire, BD19 3PS, United Kingdom  
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266  
westexflooring.com info@westexflooring.com

westex.

FLOORING EXCELLENCE

**Technical Specification**

Luxury Rating	BS EN 1307:2014	LC5	
End Use Classification	BS EN 1307:2014	Class 23 Heavy Domestic Use Class 32 General Commercial Use	
Hexapod 4000	BS EN 1307:2014	3.5	
Hexapod 12000	BS EN 1307:2014	2.5	
Roll Widths		Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m	
Roll Length		Customisable (80m <sup>2</sup> +)	
Method of Manufacture		2 Fold Tufted Cut Pile, 1/8" Gauge	
Tuft Density*	ISO 1763	136,400 per m <sup>2</sup>	
Pile Material		80% Wool 20% Nylon	
Pile Height above Backing*		10.5mm	
Total Carpet Thickness*		12.5mm	
Primary Backing		Polypropylene	
Flammability	BS4790 Hot Nut Test	Low Radius of Char	
Reaction to Fire	BS EN 13501	Class C <sub>fl</sub> -s1	
Delamination	BS ISO 11857	Pass Minimum 15.00 (N)	
Thermal resistance	BS4745	1.92 tog	
Dimensional Stability	ISO 2551-1981 (2010)	Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5%	
Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing	BS EN ISO -B02 BS ISO -I8168 BS EN ISO -X12	4-5 4 4	
Electrical Resistance	ISO 10965:2011	Pass Does not exceed 10Ω	
Sound Absorption		Class C with Underlay	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Guarantee		6 Years	
IMO Certified	IMO FTP Code 2010 Part 2 & Part 5	Pass Available on request	
CE Mark	EN 14041		

\*Commercial Tolerance +/- 10%



Westex Carpets Limited.  
 Castle Mills, Moored, Cleckheaton, West Yorkshire, BD19 3PS, United Kingdom  
 Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266  
 westexflooring.com info@westexflooring.com

