

thermofoil
UNDERLAMINATE FOIL



Thermofoil PRO™ is an aluminium underfloor heating foil designed to bring the underfloor heating experience to laminate flooring, carpet & vinyl.

- ✔ Designed for use under laminate and engineered flooring
- ✔ Continuous earth braid for ultimate electrical safety
- ✔ Twin conductor cable
- ✔ Simple cut and return installation
- ✔ Accessible cable loops
- ✔ 15 year warranty

140W/M² UNDERLAMINATE FOIL

Thermofoil PRO™ is specifically designed to give the perfect spread of heat when installed under floating laminate flooring and engineered boards.

Thermofoil PRO™ comes in 500mm wide strips in lengths from 2 – 24m and at just 2.5mm thick, is perfect for applications where height build up matters.

This underfloor floor heating system includes a fluoropolymer insulated heating cable encased in specially reinforced aluminium foil that allows for simple roll-out installation without worrying about cable spacing.

ENHANCE EVERY PROJECT

Enhance your project with Thermofoil PRO™ premium quality underlamine foil. The Thermonet® experience guarantees a hassle free installation and ultimate comfort.

Heat transfer foil



INCLUDED IN THE RANGE

- Thermofoil PRO™ 140W/m²
- Econosoft Acoustic Barrier
- Econospeed HDF Overlay
- Aluminium Fixing Tape
- Rigid Insulation Board
- Available in lengths of 21m - 241m

WHAT'S IN THE BOX

- Thermofoil PRO™ mat
- Instruction Manual

FLEXIBLE SIZING FOR ANY ROOM

Thermofoil PRO™ under laminate heating mats are available in standard lengths up to 24lm to fit rooms of between 1 - 12m². Multiple Thermofoil PRO™ mats can be installed in parallel to fit larger areas.

EASY INSTALLATION

Thermofoil PRO™ comes on a fixed output roll ready to fit. You can be assured of a fast and easy installation.

PRIMARY HEAT SOURCE FOR NEW BUILDS

Thermofoil PRO 140W/m² is ideal for use as a primary heat source in new build projects, when insulated to the required level.

SUITABLE FOR LAMINATE, CARPET & VINYL

Thermofoil PRO™ can be installed under a wide range of floor finishes including engineered timber, laminate, carpet and vinyl.

Always check with your flooring manufacturer that your chosen floor finish is suitable for use with 140W/m² underfloor heating systems. Depending on your floor finish you may also need to install Econospeed HDF overlay.

SIMPLE CUT AND RETURN INSTALLATION

Thermofoil PRO™ 140W/m² can be cut and returned for easy installation. The accessible cable loops make it easy to cut the foil, just make sure you don't cut the heating cable!

NEW LONGER COLD TAIL CABLE

Thermofoil PRO™ now features our longer low profile 5Lm cold tail cable, making installation easier and more flexible.




Econosoft Acoustic Barrier

Every Thermofoil PRO installation should include a layer of Econosoft Acoustic Barrier to act as a protective cushioning layer between the underlamine heating and the floor finish.

Econospeed Performance HDF Overlay

Econospeed is a low resistance, free floating sub floor specifically designed for installation over all kinds of underfloor heating systems. This unique product provides a perfectly smooth, stable and seamless sub floor for laying laminate, carpet and vinyl floor finishes.

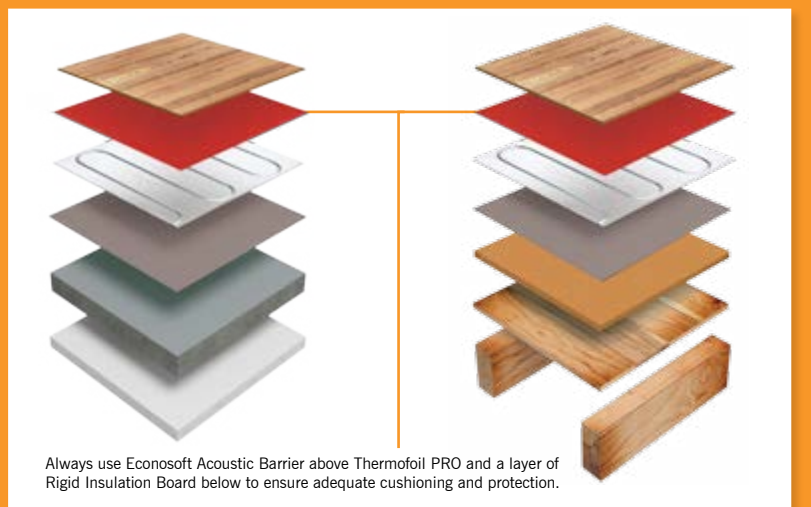

Always use Econosoft Acoustic Barrier above Thermofoil PRO and a layer of Rigid Insulation Board below to ensure adequate cushioning and protection.

Use with different finishes and substrates...

You can install Thermofoil PRO™ on timber or concrete substrates under a wide range of finishes including laminate, wood, carpet or vinyl. Always check suitability with your flooring manufacturer and adhere to guidelines on maximum floor temperatures

Thermofoil PRO™ 140 W/m²

STOCK NO	SIZE (M)	AREA (M ²)	OUTPUT (W)
121402	2.0 x 0.5	1.0	140
121403	3.0 x 0.5	1.5	210
121404	4.0 x 0.5	2.0	280
121405	5.0 x 0.5	2.5	350
121406	6.0 x 0.5	3.0	420
121408	8.0 x 0.5	4.0	560
121410	10.0 x 0.5	5.0	700
121412	12.0 x 0.5	6.0	840
121414	14.0 x 0.5	7.0	980
121416	16.0 x 0.5	8.0	1120
121418	18.0 x 0.5	9.0	1260
121420	20.0 x 0.5	10.0	1400
121424	24.0 x 0.5	12.0	1680

©Thermogroup UK 2015 E&OE TFP_140815

CONTACT US ONLINE

Browse our full product range, watch videos, download product literature and get a quote, all on the Thermogroup UK website.

www.thermogroupuk.com

CONTACT US BY PHONE

Got a question or query? Call our UK support line free from your land line. Open 07:30 - 16:30 Mon - Fri

0800 019 5899

CONTACT US BY MAIL

Tell your satnav where to find us or just write us a letter to say hello!

Thermogroup UK, Bridge House, Hop Pocket Lane, Paddock Wood, Kent. TN12 6DQ.