


ATTEND TO THE FOLLOWING
ISSUES: -

Job No: 529283
Name:
Address:
Tel:
Sheet: of:

1 Pull back + re-fit runner
on top stairs where short
on width and re-fit back
in line with runner above

2 Pull back riser where meets
hall floor. Run a bead of
clear silicone between riser
+ hall then re-fit riser
tucking frayed edges into
silicone as per diagram

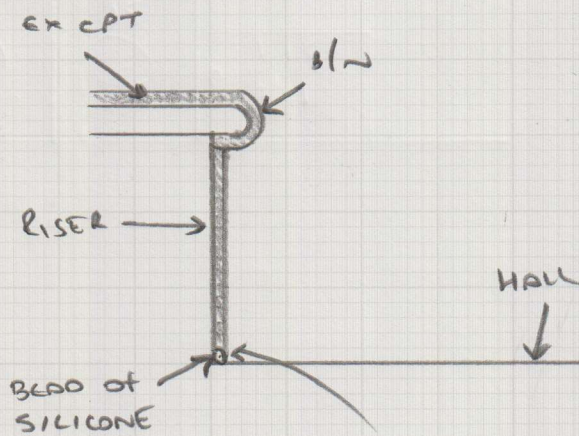

• HALL TILES HAVE JUST
BEEN RE-FURBISHED
SO BE VERY CAREFUL
AS I HAD TO CLEAN
UP SPRAY GWE WHEN
I DID MY INSPECTION

WHEN RISER IS SPLAYED
ON PUSH TO FRAIED EDGE
AT BOTTOM INTO SILICONE
WITH CARE TO HOLD
YARN.

