

POY

Job No: (S) 29777
Name: CROSS


Address:

Tel:

Sheet: (1) of (2)

FYI - SEE CROSS SECTION
OF THE ORDER OF WORKS
REQUIRED

CROSS SECTION OF FLOOR ONCE DONE

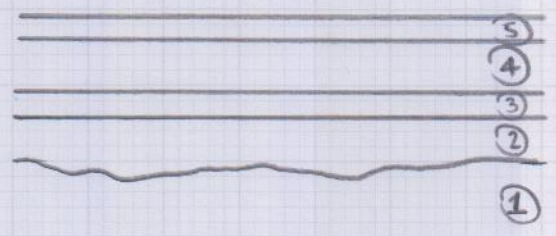

1 = ORIGINAL SUB FLOOR

2 = 1ST LAYER OF SCREED. THIS IS REQUIRED TO SMOOTH FLOOR BEFORE DPM

3 = DPM (DAMP PROOF MEMBRANE)

4 = 2ND LAYER OF SCREED. THIS IS REQUIRED TO STICK FLOORING TO.

5 = TILES

Job No: (S) 29777

Name: CROSS


Address:

Tel:

Sheet: (2 of 2)

Ray

LAYOUT (NET MEASURES)
+ INSTRUCTIONS

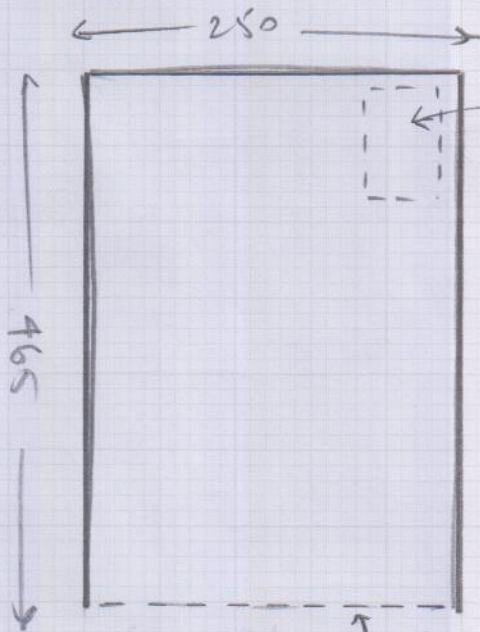

MANHOLE WITH A STEEL LID HERE.
FIT ETR303UFO AROUND THEN GLUE TILE TO PLY + LEAVE LOOSE ON STEEL LID AS AGREED.

- CONC FLOOR.
- APPLY DPM.
- NEEDS SCREEDED.

curbstone/nisheen
s/n
SWEET TO FLOOR
+ SCREEGED INTO

NOTE:

FLOOR IS NOT LEVEL AS CUSTOMER IS AWARE. I INFORMED CUSTOMER THAT HE WILL SMOOTH THE FLOOR WHEN HE SCREEDED NOT LEVEL