

Double Bond Delux DBD^{6.5}

Commercial rubber crumb underlay

Characteristic	Test Method	Result
Nominal thickness	BS EN 14499:2015	6.50mm
Roll length		11.00m
Roll width		1.37m
M ² per roll		15.07m ²
Nominal roll weight		ca.40kgs
End use specification	BS EN 14499:2015	HCIU Heavy Contract Use
Work of compression	BS 4098: 1975	95J/m ²
Retention of work of compression	BS 4098: 1975	97%
Compression after dynamic loading	BS 4098: 1975	2.60mm
Loss in thickness after static loading	ISO 3416	3.10%
Loss in thickness after dynamic loading	ISO 2094	3.10%
Breaking strength - length	EN ISO 13934-1 ^a	530N
Breaking strength - width	EN ISO 13934-1 ^a	180N
Extension under force - length	EN ISO 13934-1	1.80%
Extension under force - width	EN ISO 13934-1	1.80%
Resistance to cracking	BS EN 14499:2015	Pass
Flammability Hot Metal Nut Test	BS 4790: 1987	Low radius of effects of ignition
Tog rating	BS 4745: 2005	11
Impact sound improvement	BS EN ISO 10140-3:2010	30dB

Volante

London & South East
volante.uk.net 020 8947 6561

Planners Services & Sundries

London & South East
planners.uk.net 020 7609 8321

John Palmer Carpets

Fareham Hampshire
palmer.uk.net 01329 221 9333

PR Flooring Supplies



Glasgow
prfco.uk 0141 423 8981

Pennine Flooring Supplies

Heywood, Chester, Carlisle
pennineflooring.com 01706 627 255

Potts & Ward Woodcocks

Brighton
pwwflooring.uk.net 01273 557 211

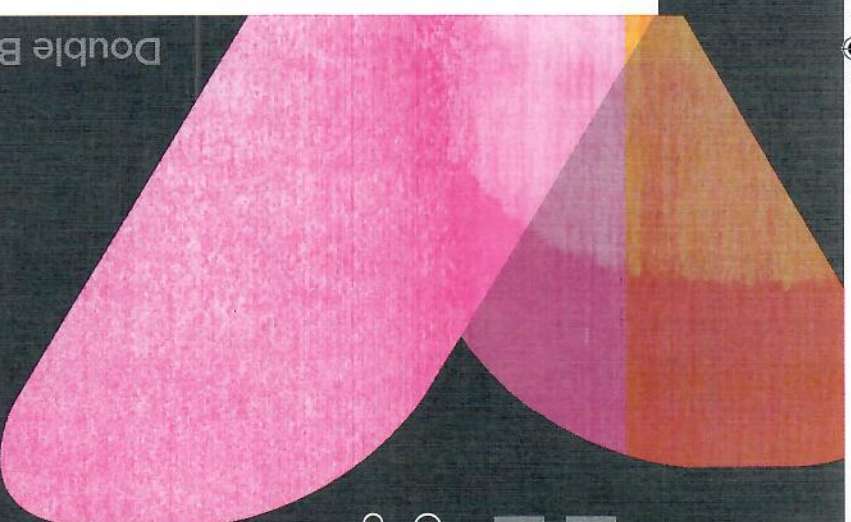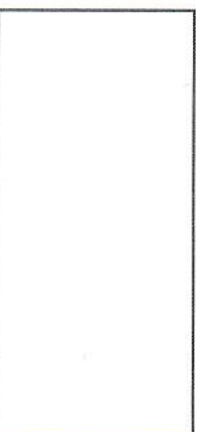

Double Bond Delux DBD^{6.5}

Commercial rubber
crumb underlay

